# Product Catalogue 2024





# **The Lighting Specialists**

www.led-global.com

#### **About LED Global**

LED Global as a brand launched in 2015 in Ireland. We supply a range of LED Lighting products that are suitable for the Agricultural, Automotive, Construction Equipment, as well as Forestry & Mining Equipment markets.

Our brand and product range has grown substantially since 2015, as has our customer base with us now exporting to the UK and many European countries.

2023 has brought a new chapter to our brand with the opening of our new offices and distribution centre in Frankfurt, Germany. This ensures the distribution of orders to our mainland European customers is much faster and more cost effective. We also have our full sales and customer service team providing assistance to our customers from our base in Frankfurt.

#### **Our Products**

LED Global supplies a comprehensive range of lighting products, as well as safety products to the Agriculture, Automotive, Construction Equipment, Forestry & Mining markets.

The main categories of products we supply are: Driving & Work Lighting, Warning Lighting, Combination Tail Lighting & Marker Lighting, Interior Vehicle Lighting & Camera Rear View Systems.

Our biggest product range is the Tractor Fit LED lighting, suitable for the upgrade of lighting on all makes and models of agricultural vehicle. These lights are a premium level product and hold the highest quality certs such as EMC CISPR 25 and IP68 ratings.

All products are produced to the highest of quality standards and design. We ensure that all our products are certified with ECE Approvals such as R65 on warning lighting and R112 for driving lighting. We will only produce items that hold a minimum of EMC CISPR 25 Class 3, but all of our driving and tractor fit lighting hold the Class 4 certification.

VILVO

#### Why Choose Us

What makes LED Global different? We offer not only a wide range of quality products to suit the relevant industries, but also have many years of experience in product development in these markets.

For example, we have built and provide an extensive database of OEM cross reference numbers for our tractor fit lighting, making it easier to choose the correct item for your vehicle. We have also produced the product with the same plug in connectors as the existing vehicle, making the fitting of the products easier with a plug and play system. This limits the need for qualified technicians to join wires etc which is time saving and cost effective for our customers.

We are constantly moving forward with new product development as technology advances. We are developing more and more products with brighter lit LEDs , while using less power (Wattage).

In recent times, for example, we have seen the emergence of LED warning flashing built into driving lights and bars. This is adding more value for money to the consumer, as well as an enhanced driving experience with added safety features.

Not only are we offering all of this, but also a premium product, with a robust, durable and

#### The Production Process

There is a comprehensive process to developing our products. Some of the steps included are:

Step 1 - Product designing by engineers using the latest software technology.

Step 2 - The production of moldings and samples in order to undergo rigorous testing procedures.

Step 3 - The testing of these samples on vehicles and machinery in all types of conditions and climates.

Step 4 - The mass production, quality control and certification, such as ECE, CE, IP Ratings.

Step 5 - The branding and shipment of the products to our distribution centres for selling to our customers and onto the consumer.

These processes mean that we ensure that quality and performance is maintained throughout each step. The end result is a premium, high class product, meeting and exceeding market standards.



# **Driving & Work Lighting**

- LED Driving Lights Page 5 13
- LED Headlights Page 14 22
- LED Tractor Fit Work Lights Page 23 31
- LED Universal Work Lights Page 32 38

# LED Warning Lighting

5-38

39-57

58-71

73-75

79-83

84-87

- LED Warning Light Bars Page 40 42
- LED Beacons Page 43 49

- Forklift Warning Products Page 50
- Beacon Brackets Page 51
- Warning Strobes Page 52 57

# LED Tail Lighting

- LED Truck & Trailer Lighting Page 59 60
- LED Trailer Lighting Page 61 66
- Bespoke Trailer Lighting Kit Page 67
- LED Maker Lighting Page 68 69
- LED License & Reverse Lighting Page 70
- LED Fog Lighting Page 71

# **LED Interior Lighting**

LED Interior Lighting - Page 72 72

# LED Bulbs

LED Bulbs - Page 74 - 75

# LED Torches

LED Torches - Page 77 - 78 **76-78** 


# **Camera Systems**


- Wired Camera Systems Page 80 81
- Wireless Camera Systems Page 82 83

# Parts & Equipment

- Plugs & Sockets Page 85 86
- Booster Cables Page 87
- Fuel Transfer Pumps Page 87



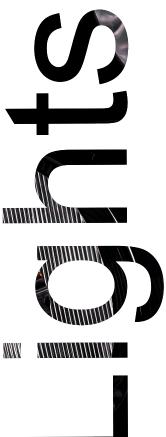

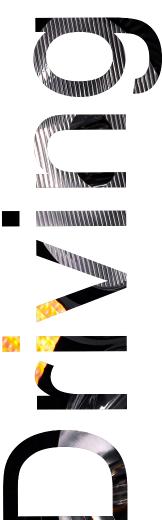

# LED Driving Lamps




# Part Number: LG877

#### 120 Watt 9" LED Driving Light with Dual Colour Position & Amber Warning Strobe

Specifications:

- E marked (E8, ref. 37,5), ECE R112 / R10 / R7 (white position light)
- EMC secured (does not disturb the radio)
- With position light (4 LEDs) yellow-orange or xenon white (connect the colour you want)
- 12000 lumens (theoretical), 9600 lumens (actual)
- TIR Optical system (Total Inner Reflection)
- 120 W (12 x 10 W Cree XM-L2 LED)
- 4 pcs LED for strobe light
- Nominal power 92,4 W
- IP68 (water/dust proof)
- 6 pole DT connector (6-pin adapter included)
- Electronic heat management
- Voltage 9-36 V
- Load 7,7 A @ 12 V and 3,6 A @ 24 V
- Width: 218 mm , Height: 234,5 mm (incl bracket) ,Depth: 68,5 mm
- Weight: 1,9 kg
- Cable length: 650 mm



#### www.led-global.com

# **LED Driving Lamps**








## Part Number: LG876

60 Watt 7" LED Driving Light with Dual Colour Position Light

- 9 36 Volts
- 60 Watt
- 6000 Lumen
- 60 x 3 Watt LED
- White or Amber Position Light
- Size: 180 x 190 x 67.5mm
- Die Cast Aluminium Alloy Housing
- EMC Protected Class 5
- Unbreakable PC Lens
- ECE R10, ECE R149 (R112) ECE R148 (ECE R7)




## Part Number: LG930

120 Watt 9" LED Driving Light with Dual Colour Position Light

- 9 36 Volts
- 120 Watt
- 12000 Lumen
- 4 x 20 Watt & 4 x 10 Watt LEDs
- White or Amber Position Light
- Size: 218 x 233 x 84mm
- Die Cast Aluminium Alloy Housing
- EMC Protected Class 5
- Unbreakable PC Lens
- ECE R10, ECE R149 (R112) ECE R148 (ECE R7)

#### COMBO BEAM






# Part Number: LG933

#### 120 Watt LED Driving Light with Dual Colour Position & Amber Warning Strobe

#### Specifications:

- E marked (E8, ref. 37,5), ECE R112 / R10 / R7 (white position light)
- EMC secured (does not disturb the radio)
- With position light, yellow-orange or xenon white (connect the colour you want)
- 10000 lumens (theoretical), 9600 lumens (actual)
- TIR Optical system (Total Inner Reflection)
- 120 W (4 x 25 W Cree XM-L2 LED) (2 x 10 Watt Position Lights)
- 4 pcs LED for strobe light
- Nominal power 92,4 W
- IP68 (water/dust proof)
- 6 pole DT connector (6-pin adapter included)
- Electronic heat management
- Voltage 9-36 V
- Load 7,7 A @ 12 V and 3,6 A @ 24 V
- Width: 247 mm , Height: 176 mm (incl bracket) ,Depth: 92 mm
- Cable length: 650 mm





# **LED Driving Lamps**





- DC 9 36 Volts
- Over/Under Voltage Protection
- White or Amber Position Light
- ECE R 10, ECE R149, ECE R148
- Size: 244 x 138 x 110mm
- EMC Cispr 25 Class 4
- Complies with IP68
- Main Beam: 60 Watt
- Position Light: 3.5 Watt

## Part Number: LG888

60 Watt LED Jumbo Driving Light with Dual Colour Position Light

## Part Number: LG827




#### 100 Watt LED Driving Light with White Position Light & Amber Strobe


- DC 9 36 Volts
- Over/Under Voltage Protection
- White Position Light
- Amber Strobe Function
- 10920 Lumen
- ECE R 10, ECE R149, ECE R148, R65
- Size: 189.5 x 71.2mm
- EMC Cispr 25 Class 4
- Complies with IP68
- Main Beam: 100 Watt
- Position Light: 3.5 Watt



# **LED Driving Bars**



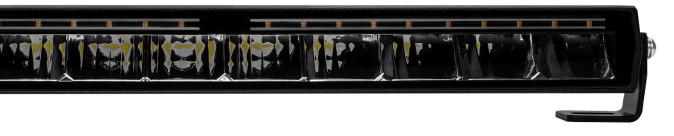

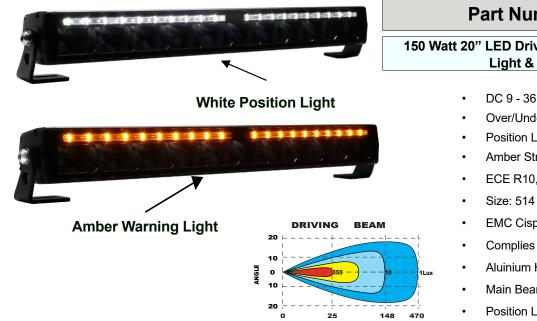



## Part Number: LG894

#### 150 Watt 20" LED Driving Bar with White Position Light & Amber Strobe

- DC 9 36 Volts
- Over/Under Voltage Protection
- Position Light White
- Amber Strobe Function
- ECE R10, ECE R112, ECE R7, R65
- Size: 514 x 54 x 61.5mm
- EMC Cispr 25 Class 4
- **Complies with IP68**
- Aluinium Heatsink & casing
- Main Beam: 150 Watt
- Position Light: 3.5 Watt



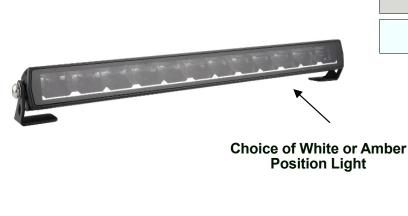



Meters

#### Part Number: LG828

#### 96 Watt 20" LED Driving Bar with Dual Colour **Position Light**

- DC 9 36 Volts
- Over/Under Voltage Protection
- Position Light White or Amber
- ECE R10, ECE R112, ECE R7
- Size: 520 x 40.5 x 52.5mm
- EMC Cispr 25 Class 4 •
- 522m at 1 lux
- **Complies with IP68**
- Aluinium Heatsink & casing
- Main Beam: 96 Watt
- Position Light: 3 Watt

## Part Number: LG826



# **Super Slim Driving Bar Series**





The new series of LED Driving Bars incorporate reflector technology in its driving performance, but also in its dual colour position lighting. It is produced with a sleek aerodynamic housing which limits drag while driving. It is also fitted with a high quality breather filter to limit any build up of condensation within the inside of the housing.


The newest and coolest technology feature of this series is the dual beam function. These bars can be used and have a seperate cable for each of the following: driving beam which is ECE road legal certified. It also has an off road feature which at the push of a button will give a brighter and longer distance beam for off road use.

# **Features & Benefits**

- 2 Colour Position Light (White & Amber)
- 2 Function Driving & Off Road Beam
- Super Slim Housing
- Reflector Beam Technology

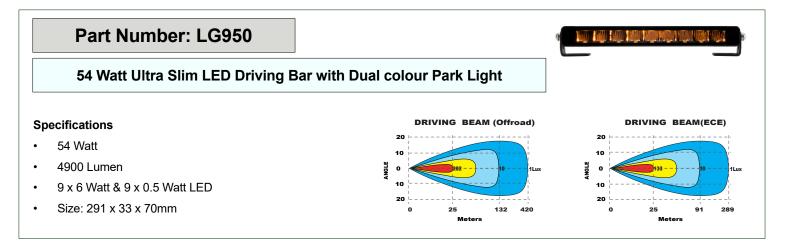

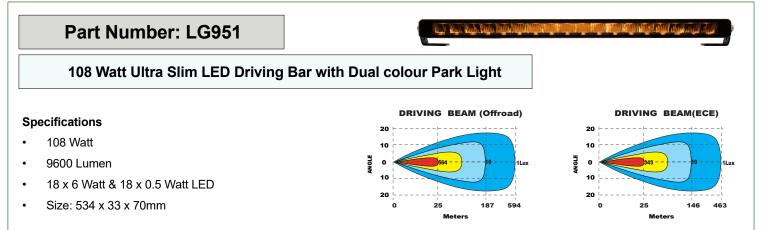

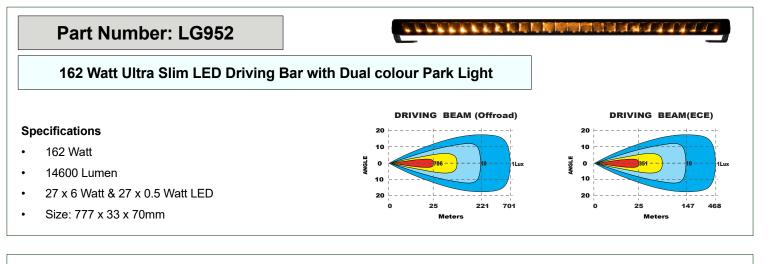

Part Number: LG953 216 Watt Ultra Slim LED Driving Bar with Dual colour Park Light **DRIVING BEAM (Offroad)** DRIVING BEAM(ECE) Specifications 20 20 216 Watt 10 10 ANGLE NGLE 19400 Lumen 10 10 36 x 6 Watt & 36 x 0.5 Watt LED • 20 20 n 25 241 762 n 25 147 468 Size: 1020 x 33 x 70mm Meters Meters











# **LED Headlights**

# Left - LG820L (UK/IRL) - LG820LEU (EU)

# Right - LG820R (UK/IRL) - LG820REU (EU)

#### 100 Watt LED Headlight with Indicator & DRL


- DC 9 32 Volts
- High Beam = 60 Watt Low Beam = 30 Watt DRL = 10 Watt
- 5600 Lumen High Beam / 2400 Lumen Low Beam
- ECE R 10, ECE R149, ECE R148, R65
- Size: 229 x 152 x 106mm
- EMC CISPR 25 Class 4
- Complies with IP68
- Supplied with 6 Pin Deutsch Socket & Plug
- Suitable on Construction Equipment such as JCB & Manitou



# LG838 (UK/IRL) - LG838EU (EU)

#### 102 Watt LED High & Low Beam Headlight with DRL

- DC 9 32 Volts
- High Beam = 60 Watt, Low Beam = 30 Watt, DRL = 12 Watt
- Size: 165 x 105 x 80mm
- 5760 Lumen
- IP 68
- EMC to CISPR25 Class 4
- ECE R10 Approved
- ECE R112 , ECE R148
- Diecast Aluminium Housing
- Supplied with H4 Plug & Play Connector

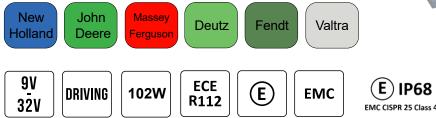




(E) IP68

EMC CISPR 25 Class 4

# **LED Headlights**



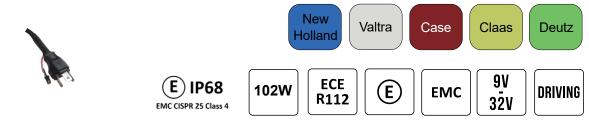


Original Equipment names & images are quoted and shown for reference purposes only and are not intended to infer that our replacement parts are used as original equipment.

# LG884 (UK/IRL) - LG884EU (EU)

#### 90 Watt LED Headlight with indicator & DRL

- High Beam = 60 Watt
- Low Beam = 30 Watt, DRL = 4 Watt
- Size: 190 x 135 x 91mm
- IP 68
- EMC to CISPR25 Class 4
- ECE R10 Approved
- ECE R112 , ECE R148 (R87)
- Diecast Aluminium Housing
- Supplied with H4 Plug & Play Connector
- Suitable for Fiat Tractors

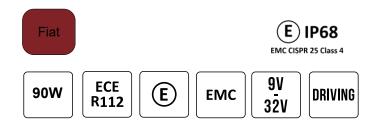







# LG874 (UK/IRL) - LG874EU (EU)

62 Watt LED High & Low Beam Headlight with DRL


- High Beam = 30 Watt
- Low Beam = 20 Watt, DRL = 12 Watt
- Size: 157 x 93.5 x 80mm
- IP 68

Valtra

- EMC to CISPR25 Class 4
- ECE R10 Approved
- ECE R112 , ECE R148 (R7)
- Diecast Aluminium Housing
- Supplied with H4 Plug & Play Connector
- Suitable for Valtra & Deutz

Deutz







# LG893 (UK/IRL) - LG893EU (EU)

90 Watt LED High & Low Beam Headlight

- High Beam = 60 Watt
- Low Beam = 30 Watt,
- Size: 127 x 127 x 79mm
- IP 68
- EMC to CISPR25 Class 4 •
- ECE R10 Approved •
- **ECE R112**
- **Diecast Aluminium Housing**
- Suitable for John Deere


















John Deere

# LG885 (UK/IRL) - LG885EU (EU)

114 Watt LED High & Low Beam Headlight with DRL

- High Beam = 60 Watt
- Low Beam = 30 Watt
- DRL = 24 Watt
- Size: 115 x 108 x 124.6mm
- IP 68
- EMC to CISPR25 Class 4
- Supplied with 9005 & AMP Plug
- ECE R10 Approved
- ECE R149( R112) , ECE R148 (R7)
- **Diecast Aluminium Housing**



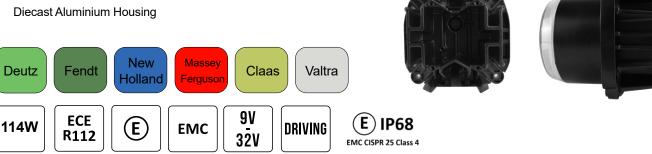

# LG819 (UK/IRL) - LG819EU (EU)

90 Watt LED High & Low Beam Headlight

- High Beam = 60 Watt
- Low Beam = 30 Watt
- Size: 144 x 166 x 118mm
- IP 68

Case

9V

32V

- EMC to CISPR25 Class 4
- ECE R10 Approved
- ECE R149(R112),
- **Diecast Aluminium Housing**

Deutz

DRIVING

New

Holland

90W

Massey

Ferguson

ECE

R112

Claas

E






# LG829 (UK/IRL) - LG829EU (EU)

102 Watt LED High & Low Beam Headlight with DRL

- High Beam = 60 Watt, Low Beam = 30 Watt
- DRL = 12 Watt
- Size: 170 x 106 x 80mm
- IP 68
- EMC to CISPR25 Class 4
- Supplied with DT Plug & play
- ECE R10 Approved
- ECE R149( R112) , ECE R148 (R87)
- Diecast Aluminium Housing

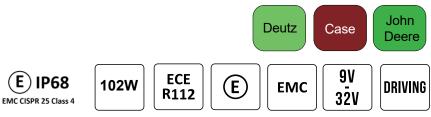



Original Equipment names & images are quoted and shown for reference purposes only and are not intended to infer that our replacement parts are used as original equipment.

# **LED Headlights**






# LG821 (UK/IRL) - LG821EU (EU)

#### 18 Watt LED Low Beam Headlight


- High Beam = 18 Watt
- 9 32 Volts
- Size: 102 x 102 x 90mm
- ECE R10, ECE R149 (R112)
- EMC to CISPR25 Class 4
- IP68
- Diecast Aluminium Housing

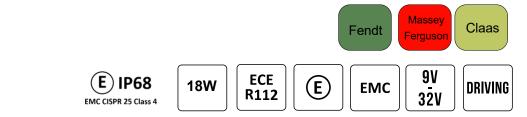

# Part Number: LG822

#### 35 Watt LED High Beam Headlight

- High Beam = 35 Watt Position = 1.6 Watt
- 9 32 Volts
- Size: 102 x 102 x 90mm
- ECE R10, ECE R149 (R112
- Diecast Aluminium Housing
- IP68
- EMC to CISPR25 Class 4

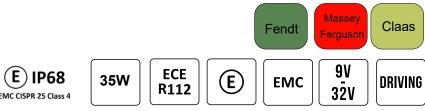











Original Equipment names & images are quoted and shown for reference purposes only and are not intended to infer that our replacement parts are used as original equipment.









# **LED Tractor Fit Work Lights**



- Size: 112 x 135 x 84.5mm
- ECE R10
- EMC to CISPR25 Class 4
- 360 Degree Swivel Bracket
- IP68
- Built in DT Male & Female Connector
- Diecast Aluminium Housing



360°



- Supplied with DT Plug & Play Connector
- ECE R10 Approved
- EMC CISPR25 Class 4

Size: 142 x 52.5 x 35mm

# amps Versal Vork




Part Number: LG801



Part Number: LG800



Part Number: LG803






Part Number: LG801 180 Watt LED Work Light Bar	Part Number: LG800         120 Watt LED Work Light Bar	Part Number: LG803         72 Watt LED Work Light Bar
<ul> <li>9 - 32 Volts</li> <li>180 Watt</li> <li>14400 Lumen</li> <li>60 x 3 Watt LED</li> <li>Combi Beam</li> <li>Size: 872 x 114 x 90mm</li> <li>Diecast Aluminium Housing</li> <li>EMC</li> <li>ECE R10</li> </ul>	<ul> <li>9 - 32 Volts</li> <li>120 Watt</li> <li>9600 Lumen</li> <li>40 x 3 Watt LED</li> <li>Combi Beam</li> <li>Size:616 x 114 x 90mm</li> <li>Diecast Aluminium Housing</li> <li>EMC</li> <li>ECE R10</li> </ul>	<ul> <li>9 - 32 Volts</li> <li>72 Watt</li> <li>5760 Lumen</li> <li>24 x 3 Watt LED</li> <li>Combi Beam</li> <li>Size: 412 x 114 x 90</li> <li>Diecast Aluminium Housing</li> <li>EMC</li> <li>ECE R10</li> </ul>
Image: Weight of the second system         Image: Weight of the second system	Izow         9V 32V           Combo         (120)	Image: Wight

#### www.led-global.com





240 Watt LED Curved Work Light Bar

- 9 32 Volts
- 19200 Lumen
- Combi Beam
- Size: 1120 x 114 x 90mm
- Diecast Aluminium

## Part Number: LG802

#### 180 Watt LED Curved Work Light Bar

- 9 32 Volts
- 14400 Lumen
- Combi Beam
- Size: 887 x 114 x 90mm
- Diecast Aluminium


# Part Number: LG814

#### 80 Watt LED High Lumen Work Light





- 9 32 Volts
- Size: 109 x 109 x 57mm
- Combi Beam
- 9500 Lumen
- ECE R10
- EMC to Cispr25 Class 3
- IP68
- Built in DT Male & Female Connector
- Diecast Aluminium Housing

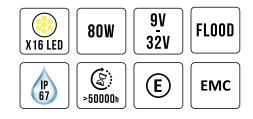

#### www.led-global.com

# Part Number: LG816

50 Watt LED High Lumen Work Light



- 9 32 Volts
- Size: 177 x 88 x 78mm
- 6000 Lumen
- Combi Beam
- Diecast Aluminium Housing
- Supplied with DT Socket & Plug
- ECE R10 Approved
- EMC Cispr 25 Class 3
- Diecast Aluminium Housing

#### Part Number: LG871

45 Watt LED Rectangular Adjustable Mount Work Light



- 9 32 Volts
- Size: 149 x 120 x 47mm
- 45 Watts
- Spot Beam
- 3000 Lumen
- Diecast Aluminium Housing
- ECE R10 Approved
- EMC Cispr 25 Class 3



## Part Number: LG810

#### 45 Watt LED Bonnet Work Light



- 9 32 Volts
- Size 155 x 109 x 73mm
- 3600 Lumen
- Spot Beam
- Diecast Aluminium Housing
- Supplied with 2 Core Cable
- ECE R10 Approved
- EMC Cispr 25 Class 3

## Part Number: LG870

30 Watt LED Adjustable Mount Work Light



- 9 32 Volts
- Size: 119 x 110 x 45mm
- 30 Watts
- Spot Beam
- 2200 Lumen
- Diecast Aluminium Housing
- ECE R10 Approved
- EMC Cispr 25 Class 3

# Part Number: LG858

#### 24 Watt Oval LED Work Light



- 9 32 Volts
- Size: 108 x 144 x 65mm
- 4000 Lumen
- Flood Beam
- Diecast Aluminium Housing
- Supplied with H9 Connector
- ECE R10 Approved
- EMC Cispr 25 Class 3

## Part Number: LG815

#### 18 Watt Rectangular LED Work Light



- 10-80 Volts
- Size: 111 x 90 x 46mm
- 1200 Lumen
- Diecast Aluminium Housing
- Spot Beam
- ECE R10 Approved
- EMC Cispr 25 Class 3

# Part Number: LG862

#### 18 Watt LED Slim Work Light



- 10-80 Volts
- Size:161 x 47 x 56mm
- 1260 Lumens
- Spot Beam
- Diecast Aluminium Housing
- ECE R10 Approved
- EMC Cispr 25 Class 3

# Part Number: LG851

#### 15 Watt Mini LED Work Light





- 9 32 Volts
- Size:51 x 51 x 47mm
- 1200 Lumen
- Flood Beam
- Diecast Aluminium Housing
- ECE R10 Approved
- EMC Cispr 25 Class 3

#### www.led-global.com

## LG860 (1PC) - LG860B ( Box Of 10)

### 48 Watt LED Work Light





- 9 32 Volts
- Size: 110 x 126 x 57mm
- 3300 Lumen
- 48 Watts
- Spot Beam
- Diecast Aluminium Housing
- ECE R10 Approved
- EMC Cispr 25 Class 3

## LG865 (1PC) - LG865B (Box of 10)

#### 15 Watt LED Work Light





- 9 32 Volts
- Size:110 x 126 x 38mm
- 15 Watts
- 1000 Lumen
- Flood Beam
- Diecast Aluminium Housing
- ECE R10 Approved
- EMC Cispr 25 Class 3

- 12 28 Volts
- Size: 230 x 47 x 47mm
- Scene Light
- 18 Watts
- 1450 Lumen
- Diecast Aluminium Housing
- ECE R10 Approved
- EMC Cispr 25 Class 3

## LG859 (1PC) - LG859B (Box of 10)

### 27 Watt LED Work Light





- 9 32 Volts
- Size 110 x 126 x 50mm
- 1900 Lumen
- 27 Watts
- Diecast Aluminium Housing
- Spot Beam
- ECE R10 Approved
- EMC Cispr 25 Class 3

### Part Number: LG890

#### 18 Watt LED Scene Light

37

## **LED Universal Work Lights**



## Part Number: LG879


#### 36 Watt LED Flood Beam Work Light

- 9 32 Volts
- 3600 Lumen
- Size: 82 x 103 x 48mm
- Flood Beam
- 9 x 4 Watt LEDs
- ECE R10
- EMC to CISPR25 Class 3
- IP68
- Fitted with Breather Filter
- **Diecast Aluminium Housing**







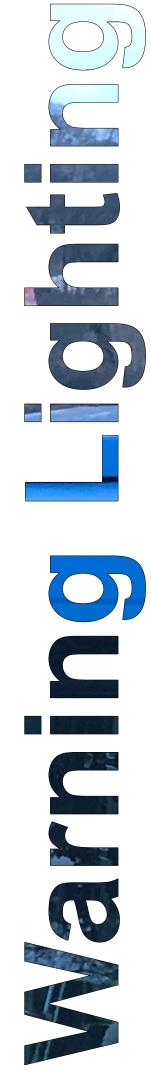

1200mm LED Amber Flashing Warning Light Bar



- 9 32 Volts
- LG639 Size: 1230 x 150 x 75mm
- LG638 Size: 790 x 150 x 75mm
- Amber Flashing
- White Side Position Light Option
- ECE R10 Approved
- ECE R65 Approved
- 29 Flash Patterns
- EMC Cispr 25 Class 3

# Amber Flash

Part Number: LG638

Part Number: LG639

1200mm LED Amber Flashing Warning Light Bar

890mm LED Amber Flashing Warning Light Bar



- 10-30 Volts .
- Magnetic Mounted with Suction Cups
- Size: 585 x 295 x 115mm
- **Dark Tinted Lens**
- ECE R10
- ECE R65 TA1
- 26 Flash Patterns
- UKCA
- EMC to CISPR25 Class 3
- IP67
- Memory Function
- Supplied with Cigarette switch

600mm Amber Flashing Magnetic Warning Bar

#### **Smoked Lens Series**

ECE EMC R65

10V 30V

MAGNETIC



- 10-30 Volts ٠
- Magnetic Mounted with Suction Cups
- Size:363 x 171 x 59mm
- Dark Tinted Lens
- ECE R10
- ECE R65 TA1
- 26 Flash Patterns
- UKCA
- EMC to CISPR25 Class 3
- IP67
- **Memory Function**
- Supplied with Cigarette switch

Part Number: LG653

365mm Amber Flashing Magnetic Warning Bar

# Smoked Lens Series





	Part Number: LG656
	300mm Magnetic Amber LED Warning Light Bar
	<ul> <li>12-24 Volts</li> <li>Size: 300 x 159 x 75mm</li> <li>Amber Flashing</li> </ul>
Supplied with In Cab Switch and Cigarette Plug	<ul> <li>8 Flash Patterns</li> <li>Magnetic Mounting Base</li> <li>ECE R10 Approved</li> </ul>
	<ul> <li>ber</li> <li>ber</li> <li>c) ECE R65 Approved</li> <li>c) EMC Cispr 25 Class 3</li> </ul>
	Part Number: LG654






### 300mm 1 Bolt Amber LED Warning Light Bar

- 12-24 Volts
- Size: 300 x 159 x 75mm
- Amber Flashing
- 8 Flash Patterns
- 1 Bolt Mounting
- ECE R10 Approved
- ECE R65 Approved
- EMC Cispr 25 Class 3

### Pole Mounted LED Warning Beacon

- 12-24 Volts
- Size: 240 x 127mm
- Amber Flashing
- 3 Flash Patterns
- Pole Mounted base
- ECE R10 Approved
- ECE R65 Approved
- EMC Cispr 25 Class 3






To change pattern remove lens and press red button



### Part Number: LG692

Magnetic Mounted LED Warning Beacon

- 12-24 Volts
- Size: 167 x 140mm
- Amber Flashing
- 3 Flash Patterns
- Magnetic Mounted Base
- Supplied with Cigarette Plug
- ECE R10 Approved
- ECE R65 Approved
- EMC Cispr 25 Class 3







Part Number: LG694

- 1 Bolt LED Warning Beacon
- 12-24 Volts
- Size: 194 x 127mm
- Amber Flashing
- 3 Flash Patterns
- 1 Bolt Down Mounting
- ECE R10 Approved
- ECE R65 Approved
- EMC Cispr 25 Class 3





To change pattern remove lens and press red button





#### Pole Mounted Fast Spinning Halogen Beacon

- 12 Volts
- Size: 290 x 150mm
- Amber Flashing
- Fast Spinning
- Pole Mounted base
- ECE R65 Approved
- Flexible Din Base
- Belt Motor



## Part Number: LG714

Pole Mounted LED Warning Beacon

- 12-24 Volts
- Size: 290 x 150mm
- Amber Flashing
- 3 Flash Patterns
- Pole Mounted base
- ECE R65 Approved
- Flexible Din Base






## **LED Warning Beacons**

### Part Number: LG707

#### Pole Mounted LED Warning Beacon

- 12-24 Volts
- Size: 208 x 128mm
- Amber Flashing
- 3 Flash Patterns
- Pole Mounted base
- ECE R10 Approved
- ECE R65 Approved
- EMC Cispr 25 Class 3






To change pattern remove lens and press red button



### Part Number: LG708

#### Magnetic LED Warning Beacon

- 12-24 Volts
- Size: 140 x 140mm
- Amber Flashing
- 3 Flash Patterns
- Magnetic Mounted Base
- Supplied with Cigarette Plug
- ECE R10 Approved
- ECE R65 Approved
- EMC Cispr 25 Class 3







To change pattern remove lens and press red button



- 12-24 Volts
- Size: 112 x 46mm
- Magnetic Mounted
- Supplied with Cigarette Plug
- ECE R10 Approved
- ECE R65 Approved
- EMC Cispr 25 Class 3
- IP67
- Amber Flashing

12-24v	MAGNETIC
ECE R65	EMC
() X 18 LED	8FP
1P 67	>50000h



#### 1 Bolt LED Warning Beacon with Amber Flash


- 12-24 Volts
- Size:142 x 120mm
- Amber Flashing
- 3 Flash Patterns
- 1 Bolt Mounted
- ECE R10 Approved
- ECE R65 Approved
- EMC Cispr 25 Class 3



## Part Number: LG706

Pole Mounted Halogen Warning Beacon

- 12 Volt or 24 Volt Bulb
- Size: 209 x 126mm
- Amber Flashing
- 1 Flash Patterns
- Pole Mounted Base
- ECE R10 Approved
- ECE R65 Approved
- EMC Cispr 25 Class 3

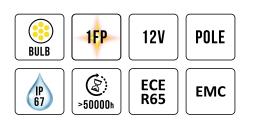



To change pattern remove lens and press red button







#### **Rechargeable LED Magnetic Warning Beacon**

- 10 30 Volts
- Size: 150 x 130mm
- Magnetic Mounted
- 8 Flash Patterns
- ECE R10 Approved
- 3 Pieces of 18650 Lithium Battery
- IP67
- Amber Flashing
- Battery Indicator on Front



### Part Number: LG773 LED Rechargeable Warning Strobe Kit Magnetic Mounted Supplied with Cigarette Plug & Cable IP67 ECE R10 Approved ECE R65 Approved 1 Flash Pattern (Double Flash) IP67 Amber Flashing Supplied in Carry Case 2 Hours Charging Time 8 Hours Work time on full Charge 10V ECE E) IP 67 EMC 1FP MAGNETIC R65 3<u>o</u>v >50000h X12 LED




- E Approved
- Orange Colour
- Break Strength 14700n
- Flexible Din Mount







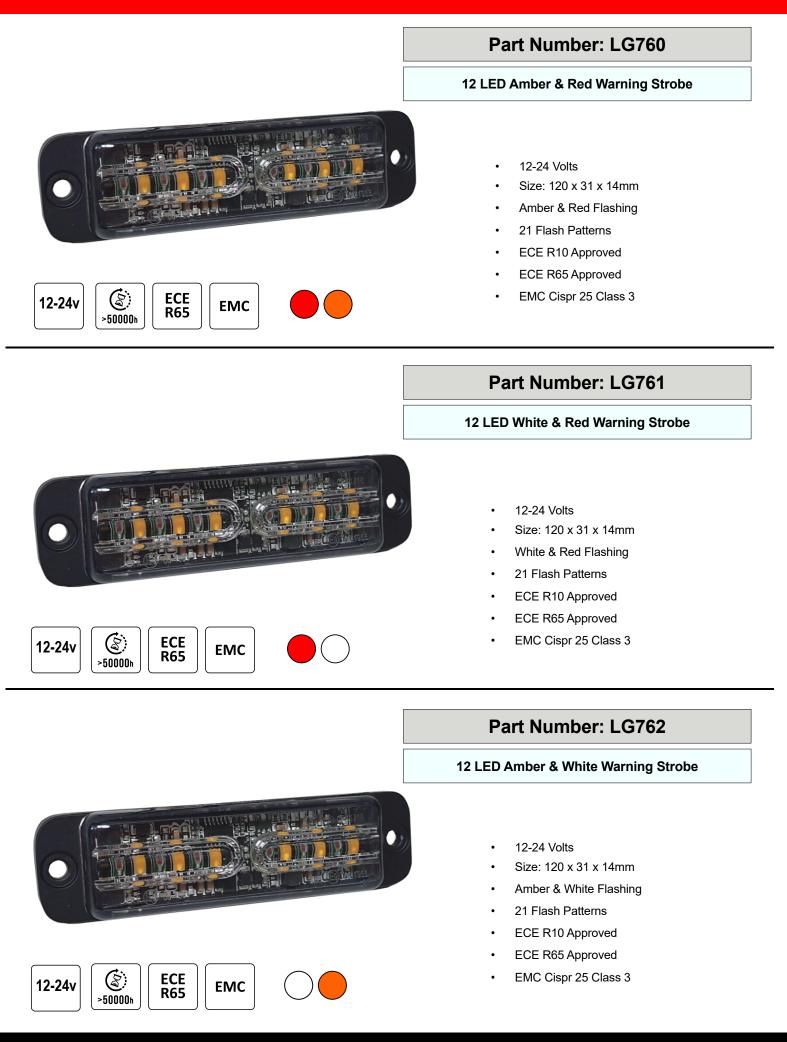

#### 6 LED Amber Warning Strobe

- 12-24 Volts
- Size: 131 x 31 x 6.6mm
- Amber Flashing
- 26 Flash Patterns
- 3M Adhesive Mounting Option
- ECE R10 Approved
- ECE R65 Approved
- EMC Cispr 25 Class 3





### Part Number: LG764

#### 4 LED Amber Warning Strobe

- 12-24 Volts
- Size: 98 x 31 x 6.6mm
- Amber Flashing
- 26 Flash Patterns
- 3M Adhesive Mounting Option
- ECE R10 Approved
- ECE R65 Approved
- EMC Cispr 25 Class 3





### Part Number: LG763

#### **3 LED Amber Warning Strobe**

- 12-24 Volts
- Size: 82 x 31 x 6.6mm
- Amber Flashing
- 26 Flash Patterns
- 3M Adhesive Mounting Option
- ECE R10 Approved
- ECE R65 Approved
- EMC Cispr 25 Class 3



ECE

R65




1P 67 (Z)

>50000h

12-24v

26 FP

EMC

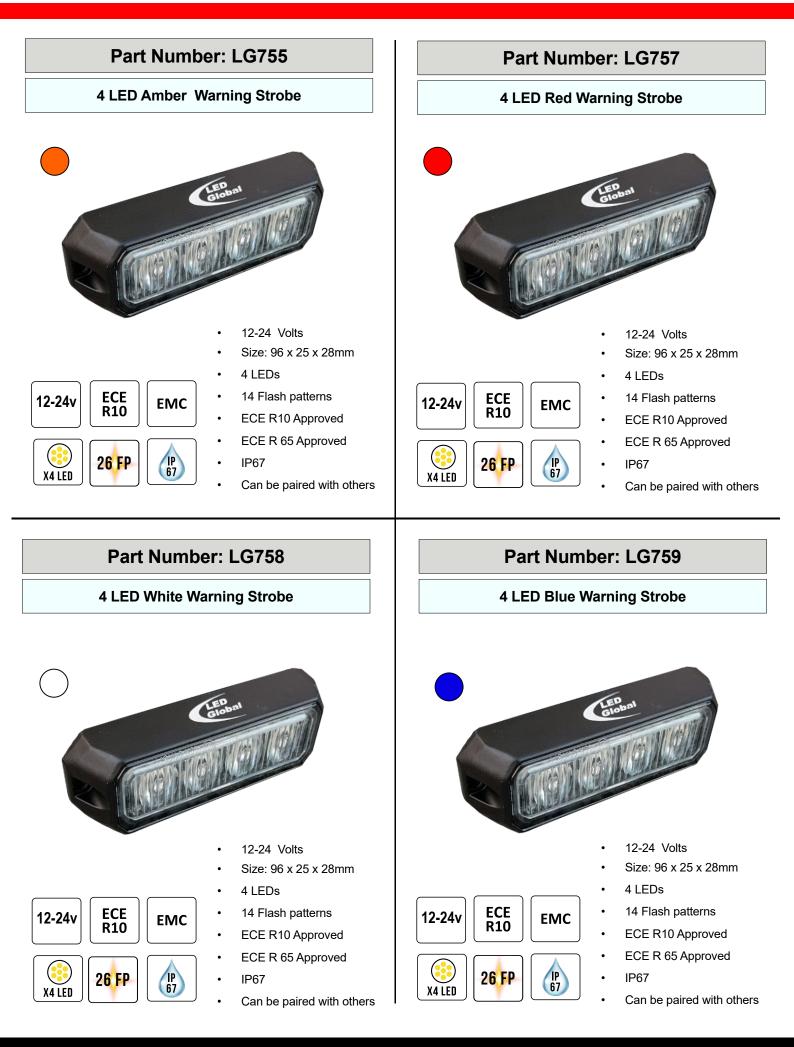




Strobe



Amber Flash




- 12-24 Volts
- Size:132 x 51 x 19mm
- 6 LED for Strobe
- 18 LED for Marker Light
  - 21 Flash patterns
  - ECE R10 Approved
- ECE R 65 Approved
- IP67

•







- 12-24 Volts
- Size: 132 x 51 x 19mm
- 6 LED for Strobe
- 18 LED for Marker
- 21 Flash patterns
- ECE R10 Approved
- ECE R 65 Approved
- IP67

•

•

•

•





### 2 LED Hideaway Amber Warning Strobe



E)

50000h

26 FP

1P 67

EMC


ECE

R65


9-30V

•

- 9-30 Volts
- Size 27 x 24 x 39mm
  - 2 LEDs
- 26 Flash patterns
- ECE R10 Approved
  - ECE R 65 Approved
  - Can be paired with others



2 LED Hideaway Red Warning Strobe



- 9-30 Volts
- Size 27 x 24 x 39mm
- 2 LEDs
- 26 Flash patterns
- ECE R10 Approved
- ECE R 65 Approved
- Can be paired with others



## LG552 - Left / LG553 - Right

24 Volt LED Combination Truck Tail Light


- 24 Volts
- Size:486 x 130 x 70mm
- IP 67
- ECE R10 Approval
- ECE R3, R4, R6, R7, R23, R38, R91
- 7 Pin Socket on Side of Light
- Stop, Tail, Indicator, Fog, Reverse, Side Light, License Plate Light, Reflector
- Supplied with 7 Pin Plug & 1 Metre Cable
- Built in Smart Resistence on Indicators
- Including LED Number Plate Light on Left Lamp



## LG565 - Left / LG566 - Right

### 9-33 Volts LED Trailer Combination Light

- 9-33 Volts
- Size:375 x 130 x 33mm
- IP 67
- ECE R10 Approval
- ECE R3, R4, R6, R7, R23, R38, R91
- 7 Pin Socket on Back of Light
- Stop, Tail, Indicator, Fog, Reverse, Reflector
- Supplied with 7 Pin Plug & 1 Metre Cable
- Built in Smart Resistence on Indicators







LG1811 - Adaptor Cable to suit Volvo & Renault Trucks





## LG554 - Left / LG555 - Right

### 10-30 Volts LED Combination Trailer Light



- 10-30 Volts
- Size: 316 x 130 x 31mm
- IP 67
- ECE R10 Approval
- ECE R3, R6, R7, R23, R38
- Supplied with 1.5 Metre Cable
- Stop, Tail, Indicator, Fog, Reverse, Reflector



Dynamic Indicator



## Part Number: LG528

9-30 Volts LED Combination Tail Light



- 9-30 Volts
- Size: 284 x 100 x 32mm
- IP 67
- ECE R10 Approval
- ECE R3, R6, R7, R23, R38
- Supplied with 50 cm Cable
- Stop, Tail, Indicator, Fog, Reverse, Reflector



Dynamic Indicator



## LG570 - Left / LG571 - Right

## 9-33 Volts LED Triangular Combination Light

- 9-33 Volts
- Size: 218 x 145 x 35mm
- IP 67
- Stop, Tail, Indicator, Fog, Reverse & Triangle
- ECE Approved R3, R6, R7, R23, R38
- ECE R10 Approved
- 45 LEDs
- Built in Smart Resistor on Indicators







## LG574 - Left / LG575 - Right

9-33 Volts LED Rectangular Combination Light

- 9-33 Volts
- Size: 256 x 130 x 40.5mm
- IP 67
- Stop, Tail, Indicator, Fog, Reverse & Triangle
- 45 LEDs
- ECE Approved R3, R6, R7, R23, R38
- ECE R10 Approved
- Built in Smart Resistor on Indicators
- Supplied with Plug & Socket with 60cm Cable









10-30 Volts LED Cobination Tail Light



- 10-30 Volts
- Size: 272 x 100 x 27.4mm
- IP 67
- ECE R10 Approval
- ECE R3, R6, R7, R23
- Supplied with 1.5 Metre Cable
- Stop, Tail, Indicator & Reverse

Indicator



### 10-30 Volts LED Combinaton Tail Light

- 10-30 Volts
- Size: 205 x 95 x 28mm
- IP 67
- Stop, Tail & Indicator
- ECE Approved R3, R6, R7
- ECE R10 Approved
- 72 LEDs
- 1 Metre Cable








## Part Number: LG533

### 9-33 Volts LED Combination Light Pair


- 9-33 Volts
- Size:150 x 80 x 21.4mm
- IP 67
- Stop, Tail, Indicator & Reflector
- ECE Approved R3, R6, R7
- ECE R10 Approved
- Supplied as a Pair

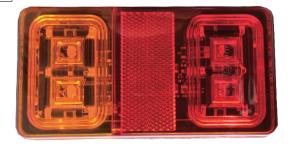

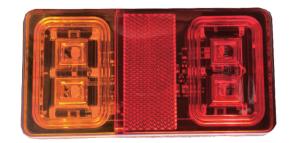



## **LED Truck & Trailer Lights**

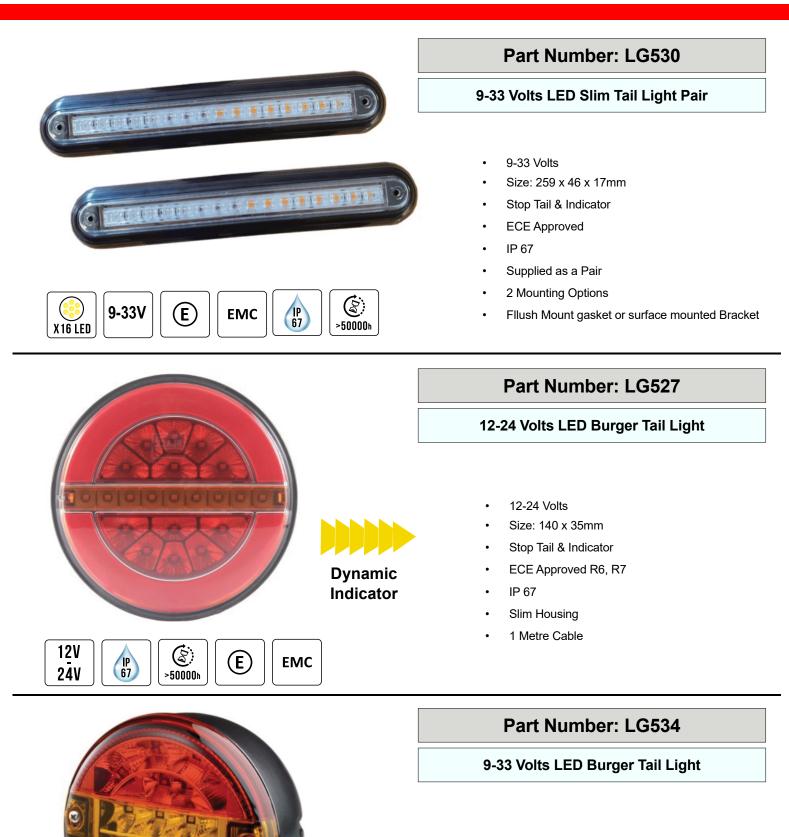

- 9-33 Volts
- Size: 140 x 58mm
- Stop Tail & Indicator
- ECE Approved R6, R7
- IP 67
- Slim Housing
- ECE Approved R10



EMC

(Z)

>50000h

E

9-33V

IP 67

### 6 LED Slim Combination Tail Light

- 12-24 Volts
- Size: 131 x 31 x 6.6mm
- Stop Tail & Indicator
- ECE R10 Approved
- IP 67
- **ECE R148**
- Can be fitted using 3M Adhesive Strip



Stop & Tail



## Part Number: LG529

### **LED Combination Tail Light Pair**

- 12-24 Volts
- Size: 106 x 98 x 36mm
- Stop Tail & Indicator
- ECE R10 Approved
- IP 67
- ECE R3 R6 R7
- Supplied as a Pair



### LG550 - 12 Mtr Cable / LG551 - 8 Metre Cable

#### **4 Foot LED Trailer Board with Fog Light**

- 12-24 Volts
- Size: 1200 mm Long
- IP 67
- Stop Tail Indicator License Plate & Fog
- ECE R10 Approved •
- ECE R3 R6 R7
- Pre Wired with 7 Pin Trailer Plug



IP 67

24V

X16 LED

EMC

**(E)** 

>50000h

## **LED Truck & Trailer Lights**



## LG556 - 7.5 Mtr Cable / LG557 - 12 Mtr Cable


### Magnetic LED Trailer Lights Kit

- 12 24 Volts
- Magnetic Base Lighting
- Stop Tail, Indicator & License Plate
- ECE Approved
- IP 67
- Prewired with 7 Pin Trailer Plug



### Part Number: LG505

Rechargeable Magnetic LED Tail Light Kit



- 12 24 Volt
- Wireless Signal from Car to Lights
- IP 67
- ECE R10 Approval
- ECE R3, R6, R7
- 2.5 Hours Charging Time
- 8 Hours Working Time on full battery
- Magnetic or Clip on Mounting
- Neon Tail Light
- Dynamic Indicator
- Stop, Tail, Indicator



## LED Trailer Light Harness Kit

## Part Number: LG576

### Complete Plug & Play LED Trailer Light Kit

- 10 30 Volts
- Size: 218 x 145mm (Combination Lights)
- IP 67
- Stop, Tail, Indicator, Fog, Reverse & Triangle Reflector
- ECE Approved R3, R6, R7, R23, R38
- ECE R10 Approved
- 45 LEDs per Light
- Built in Smart Resistor

## Whats Included

- Complete Plug & Play Cable System
- LED Combination Trailer Light Pair
- LED License Plate Light
- 7 to 13 Pin Adaptor Plug
- Plug Holder









## How it Works

13 Pin Plug wired with 1.8 Metre cable to 7 Pin Connector & 2 Pin PRS

7 Pin Connector with 2.5 Metre Cable to 3 way Splitter

3 Way Splitter is 6 Pin to Left Lamp, 6 Pin to Right Lamps & 2 Pin connector to License Plate Light

Left Light has Plug & Play with 50cm Cable to Splitter

Right Lamp has Plug and Play with 150cm Cable to Splitter

License Plate has Plug & Play Connector with 50cm Cable to Splitter





9 - 33 Volts LED License Plate Light



#### • 9-33 Volts

- Size: 85 x 50 x 30mm
- IP 67
- ECE R10 Approval
- ECE Approvals
- 4 LEDs



## **LED Reverse Lighting**

## Part Number: LG205

### 12-24 Volts LED Square Reverse Light

## Part Number: LG204

### 12-24 Volts LED Round Reverse Light



- 12 24 Volts
- Size: 88 x 90 x36mm
- IP 67
- ECE R10 Approval
- ECE Approval
- 30 LEDs
- Reverse Function





- 12 24 Volts
- Size: 140 x 58mm
- IP 67
- ECE R10 Approval
- ECE Approval
- 20 LEDs
- Reverse Function



### 12-24 Volts LED Square Fog Light

- 12 24 Volts
- Size: 88 x 90 x 36mm
- IP 67
- ECE R10 Approval
- ECE Approval
- 30 LEDs
- Fog Function





## Part Number: LG214


12-24 Volts LED Round Fog Light

- 12 24 Volts
- Size: 140 x 58mm
- IP 67
- ECE R10 Approval
- ECE Approval
- 20 LEDs
- Reverse Function







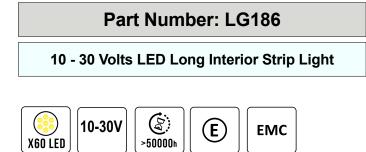

- 10 30 Volts
- Size: 570 x 45 x 16.5mm
- Pre Wired
- ECE R10 Approval
- 60 High Quality LEds
- On/Off Switch



10 - 30 Volts LED Short Interior Strip Light



- 10-30 Volts
- Size: 270 x 45 x 16.5mm
- Pre Wired
- ECE R10 Approval
- 24 High Quality LEDs
- On/Off Switch



















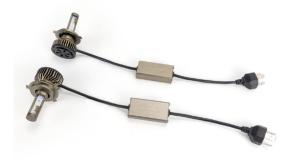

#### H4 LED Bulb Kit

- 12 24 Volts
- 50 Watt (Each Bulb)
- 4000 Lumen per Bulb
- High & Low Beam
- Long Lifetime
- High Quality Fan
- EMC & EMI
- Excellent Beam Pattern
- Copper PCB with fast heat conduction
- Vehicle Spec LED



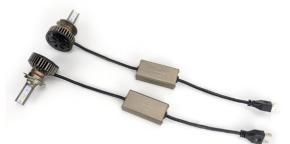

# Part Number: LG5082

#### H7 LED Bulb Kit

- 12 24 Volts
- 25 Watt (Each Bulb)
- 2000 Lumen per Bulb
- H7 Bulb
- Long Lifetime
- High Quality Fan
- EMC & EMI
- Excellent Beam Pattern
- Copper PCB with fast heat conduction
- Vehicle Spec LED

#### H11 LED Bulb Kit

- 12 24 Volts
- 25 Watt (Each Bulb)
- 2000 Lumen per Bulb
- H11 Bulb
- Long Lifetime
- High Quality Fan
- EMC & EMI
- Copper PCB with fast heat conduction



### Part Number: LG5086

#### 880/881 LED Bulb Kit

- 12 24 Volts
- 25 Watt (Each Bulb)
- 2000 Lumen per Bulb
- 880/881 LED
- Long Lifetime
- High Quality Fan
- EMC & EMI
- Copper PCB with fast heat conduction

# Part Number: LG5088

#### H1 LED Bulb Kit

- 12 24 Volts
- 25 Watt (Each Bulb)
- 2000 Lumen per Bulb
- H1 Bulb
- Long Lifetime
- High Quality Fan
- EMC & EMI
- Copper PCB with fast heat conduction









#### **Rechargeable LED Head Torch**





- LED Rechargeable Torch
- USB Charging Cable
- Flexible Head Band
- PIR Sensor
- Long Distance Beam
- 3 Modes Of Light

# Part Number: LG907

#### LED Rechargeable Warning Flare



- LED Rechargeable Flare
- USB Charging Cable
- 12 Amber LEDs
- 9 Flash Patterns
- Magnetic
- Waterproof
- Impact Resistant





#### **Rechargeable LED Mechanics Inspection Lamp**

- Rechargeable
- 8 + 1 LEDs
- Magnetic Base
- Flexible Base
- SMD LED
- Supplied with 3 Pin UK Charger Plug & USB Cable
- Long lasting Battery



# Part Number: LG913

#### Rechargeable LED Hand Torch with Power Bank

- Rechargeable LED Torch
- USB Charging Cable
- Magnetic Base
- Power bank for charging Phones
- 4 x Zoom Modes
- Long Distance Beam
- Long lasting Battery
- Aluminium Housing

# Part Number: LG903

#### Magnetic Rechargeable LED Mini Hand Torch

- Rechargeable LED Hand Lamp
- USB Charging Cable
- Magnetic Base & Hanging Hook
- 350 Lumen ( Front)
- 70 Lumen (Top)
- 180 Degree Adjustable
- Battery Indicator
- Long lasting Battery





# **Camera Systems**

111

Ŵ



26.0

AUTO

oC



#### 7" AHD Rear View Wired Camera System

Whats included: The Camera System includes a 7" AHD monitor with 2 channel input, mounted using a fan bracket. A 20 metre 4 pin connector extension lead is supplied to connect the monitor to the camera. There is one heavy duty 1080P resolution camera included with 4 Pc SMT liights for night vision.

#### **Monitor Specifications**

- 7" Montor (Diagonal)
- Aspect Ratio 16:9
- 12-24 Volt Power Supply
- 2 Way Video Input
- OSD Menu
- Supports both AHD & CVBS Input
- 1024 x RGB x 600 Resolution
- Supplied with an adjustable Fan Bracket
- Heavy Duty Housing
- 4 Pin GX12 Connector

#### **Camera Specifications**

- Resolution: 1080P
- Effective Pixels: 1920 x 1080
- IP69K Waterproof Rating
- 4 Pin Connector
- 4 Pieces of SMT LEDs
- AHD
- 120 Degrees Wide Angle View
- 30 FPS Frame Rate
- Heavy Duty Housing
- Night Vision

#### **AHD Rear View Camera**




- Resolution 1080P
- Night Vision
- 4 Pin Connector
- IP69K
- 120 Degrees Wide Angle
- AHD Camera

## Part Number: LG9003

20 Metre Cable with 4 Pin Connectors







Part Number: LG9030

#### Trailer Wiring Kit for Camera System



- 3 Metre Suzie Coiled Cable
- 4 Pin Connector to suit system Connectors
- Waterproof Connection
- Stainless steel connector ports

# Part Number: LG9002

#### 10 Metre Cable with 4 Pin Connectors



Fan Bracket for Monitor



7" AHD Wireless Rear View Camera System

Whats included: The Camera System includes a 7" AHD monitor with 4 channel input, with wireless sync technology, mounted using a choice of U shape bracket or flexible suction cup bracket. There is one heavy duty 1080P resolution wireless camera included with 4 Pc SMT liights for night vision.

#### **Monitor Specifications**

- 7" Montor (Diagonal)
- Aspect Ratio 16:9
- 12-24 Volt Power Supply
- 4 Way Video Input
- Recording
- 1024 x RGB x 600 Resolution
- U Shape or Suction Cup Bracket
- Heavy Duty Housing
- Touch Buttons with Dim lighting
- Built in Speaker

#### **Camera Specifications**

- Resolution: 1080P
- Effective Pixels: 1920 x 1080
- IP69K Waterproof Rating
- Wireless Technology
- 4 Pieces of SMT LEDs
- AHD
- 120 Degrees Wide Angle View
- 30 FPS Frame Rate
- Heavy Duty Housing
- Night Vision

#### Wireless AHD Camera to suit LG9045

- Resolution: 1080P
- Effective Pixels: 1920 x 1080
- IP69K Waterproof Rating
- Wireless Technology
- 4 Pieces of SMT LEDs
- AHD
- 120 Degrees Wide Angle View
- 30 FPS Frame Rate
- Heavy Duty Housing
- Night Vision



# Part Number: LG9025

Wireless Aerial to suit Monitor & Camera



# Part Number: LG9024

**Extension Wireless Antena to suit Camera** 











#### 50 Sq Heavy Duty Booster Cables

- 50sq copper coated aluminium
- 4 Metre red and black Cables
- Heavy Duty clamp
- Supplied in zip carrier bag



# Fuel Transfer Pumps

# LG8000 (12 Volt) - LG8002 (24 Volt)

#### **Fuel Transfer Pump**

- 12 Volt or 24 Volt Version Available
- 40 Litres per minute
- 2800 RPM Motor
- Manual Gun
- Supplied with 2.5 metre of suction hose.
- 4 metre Feed Hose





www.led-global.com